


## BAND V2 Placement

When placing BAND V2s into the MULTI-CHARGER V2, it is recommended to first fold the straps of the BAND V2s to one side.



When inserting a BAND V2, ensure to pinch the strap and body of the device together so that the strap does not overlap its neighboring charger slot.

After inserting a BAND V2, ensure it has been properly seated and is indicating that it is charging.

## Device Specifications

Electrical	
Input Voltage	24VDC
Max Input Power	15 W
Weight	466g
Dimensions	3.7 x 1.8 x 8.1in. / 94.1 x 41.4 x 205.0mm
Plastic	Polycarbonate ABS Blend
Charging Capacity	5 BAND V2 Charging Ports
Operating Temperature, Humidity	-20C to +55C, 5% to 95% relative humidity (non-condensing)
Storage Temperature	0C to +45C
Power Supply Information	
Manufacturer & Model Number	MEANWELL - GST60A24
UL Certification Number	E183223
Output Power Capacity	120 W (Up to 12 MULTI-CHARGER V2s)

## Accessories + What is Included in the Box

Included in Box	
MULTI-CHARGER V2	Charging Unit Capable of Charging 5 BAND V2s
Jumper Cables	1 Long Jumper Cable + 1 Short Jumper Cable
Mounting Hardware	4 Drywall Anchors and Screws 4 Concrete Screws (Size 3/16") 4 Rubber Feet
Wall Mounting Plate	Plastic Locking Plate for Wall Mounting

MULTI-CHARGER V2 Power Supply (Not Included)	
MULTI-CHARGER V2 Power Supply	High capacity charging system

## Legal Information

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any change or modification not expressly approved by SlateSafety could void the user's authority to operate equipment.

For Device Warranty Information, please visit: [slatesafety.com/warranty](https://slatesafety.com/warranty)


For Terms of Service, please visit: [slatesafety.com/terms-of-service](https://slatesafety.com/terms-of-service)

For Privacy Policy, please visit: [slatesafety.com/privacy-policy](https://slatesafety.com/privacy-policy)

FireHUD Inc. d.b.a SlateSafety  
MULTI-CHARGER V2




## MULTI-CHARGER V2 User Manual

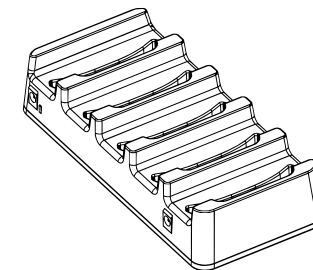

## Proper Device Usage


The MULTI-CHARGER V2 is an accessory intended to charge multiple BAND V2s simultaneously.

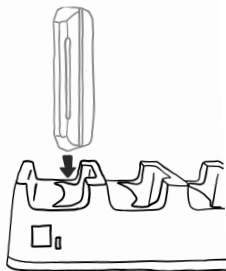

To properly use the MULTI-CHARGER V2, first apply power. Next, insert a BAND V2 into a slot of the MULTI-CHARGER V2. Ensure the strap does not hinder the fit of the BAND V2 in the MULTI-CHARGER V2. A blue LED indicates a BAND V2 is charging. A magenta LED indicates a BAND V2 is fully charged.


## Table Mounting

For table mounting, leave enough room on one side of the charger because the BAND V2s' straps protrude. The four rubber feet provided should be installed on the MULTI-CHARGER V2 in order to prevent sliding.

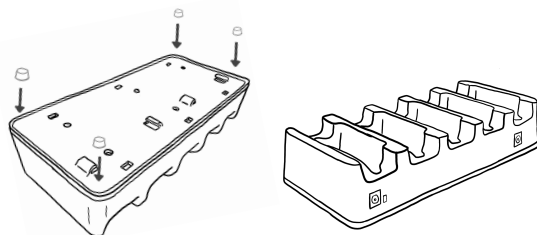

## Wall Mounting


For wall mounting, a wall mounting plate along with necessary hardware has been provided. First, remove the wall mounting plate and mark holes on the wall where it should be installed. Next, use the included hardware to mount the plate to the wall. Finally, slide the charger onto the plate and ensure a snug fit. **Important** - When wall mounting, do not install the rubber feet.

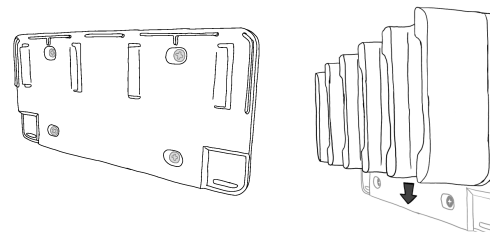

## Daisy-Chaining

The MULTI-CHARGER V2 supports daisy-chaining to create a large charging bank using one power supply. Included in the box is one long cable and one short cable, either of which can be used to connect MULTI-CHARGER V2s in series.

**Important** - A maximum of 12 MULTI-CHARGER V2s can be connected to a single power supply.

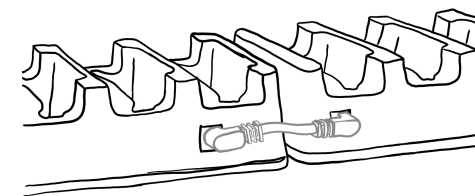

## Support Information

For additional support materials, or to open a support ticket please visit: [slatesafety.com/support](https://slatesafety.com/support)

For email support, please email: [support@slatesafety.com](mailto:support@slatesafety.com)

If you have any questions, comments, or concerns, please do not hesitate to reach out to a SlateSafety representative.

